


## **CUT OUT DIMENSIONS** 12.625 13.25 26.00 TEP824-8 TEP824HG-B Das Shown TEWD42C-B 57 1/2\* 39 1/2\* 45 1/2\* Stainless steel welded construction Polished Stainless Steel Trim INSULATING JACKETS 40 3/4" 46 3/4" 58 3/4" 34 3/4" TE00422-8 (As S) TEIJ36 TEIJ42 TEIJ54 **TEIJ30** TEDD362-B (As Shown TEB054RS-B 40.25 TEB042G-B TEB042R-B (48.5%) TEB042RS-B TEB036G-B TEB036R-B At-Shr TEB036RS-B Allow minimum of 2.50" clearance from the grill's rear edge (3.25" from cutout) to the backsplash to allow hood to fully open. TETD18T-B TETD18ZT-B TEB030R-B (44.5Nex TEB030RS-B TECC30-8 COUNTERTOP NOTCH REQUIREMENT UNIT OVERALL WIDTH UNIT CUTOUT UNIT CUTOUT FOR HOOD OPENING COUNTERTOP

The information provided is for reference purposes only. Detailed instructions and specifications unique to the product purchased can be found in the Manufacturer's Owner's Manual.



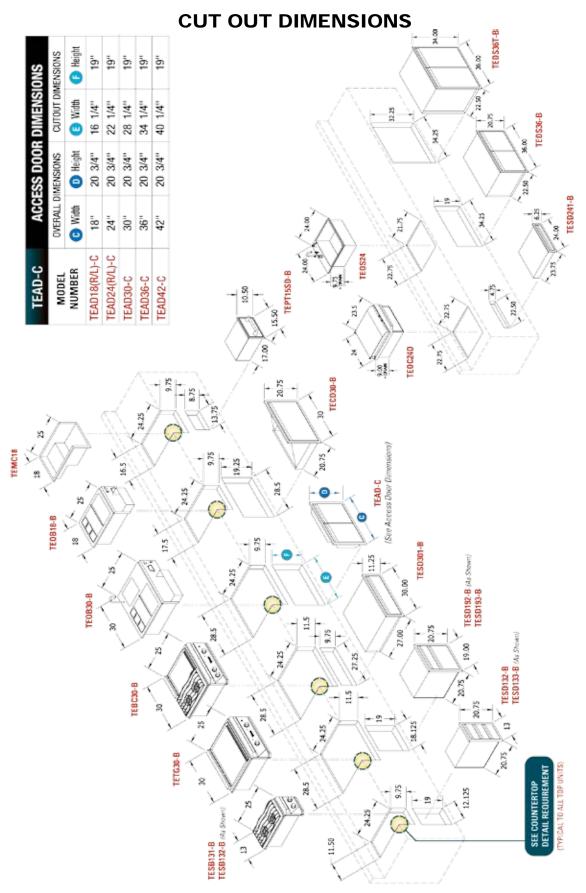

The information provided is for reference purposes only. Detailed instructions and specifications unique to the product purchased can be found in the Manufacturer's Owner's Manual.